

Pass4Sures

Pass4sures

> Contact Us

👤 Login / Register

Search...



🏠 HOME


☰ ALL VENDORS

★ GUARANTEE

? FAQ

💬 TESTIMONIALS

🛒 CART (1)

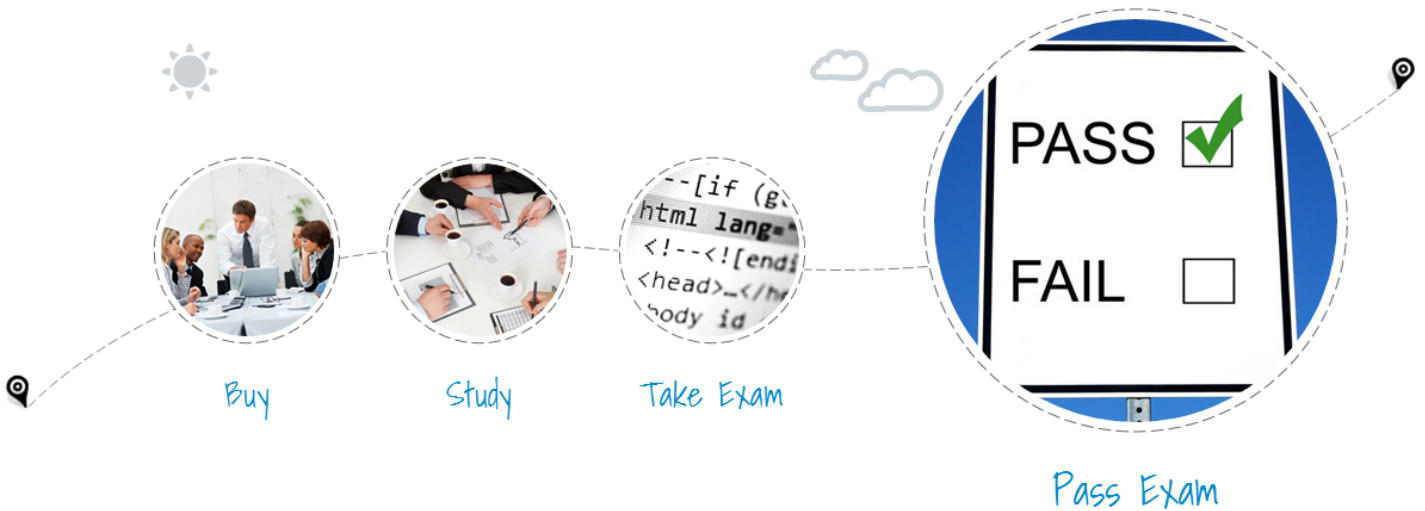

Try **PDF Demo** before you buy

We're not the only ones **happy** about Pass4sures Practice Material ...

49562+ customers in 100+ countries use Pass4sures Test Engine. Meet our customers.

iCompany

Paradoxx

iMessenger

VOREED

GetCustom

JET ORANGE



<http://www.pass4sures.top/>

Latest Exam Guide & Learning Materials

Exam : 117-303

Title : LPI Level 3 Exam 303

Vendors : Lpi

Version : DEMO

NO.1 What is true about the permissions for the file afile given the following output from getfacl? (Select TWO correct answers)

```
% getfacl afile
# file: afile
# owner: matt
# group: support
user::rwx
user:hugh:rw
group::r
group:staff:rx
mask::rwx
other::r
```

- A. Anyone in the support group will be able to read and execute the file.
- B. The user hugh will be able to read the contents of the file.
- C. Anyone in the users group will be able to read the file.
- D. The user matt will not be able to edit this file.
- E. Anyone in the staff group will be able to read and execute the file.

Answer: BE

NO.2 Which of the following export options, when specified in /etc/exports, will tell the server to use the NFSv4 Pseudofilesystem?

- A. fsid=2
- B. fsid=0
- C. fsid=3
- D. fsid=1

Answer: B

NO.3 In which of the following scenarios MUST an administrator use ethernet bridging instead of routing

when configuring an OpenVPN site? (Select TWO correct answers)

- A. Some OpenVPN clients will be installed on laptops and must be able to connect from different locations.
- B. NetBIOS traffic must be able to traverse the VPN without implementing a WINS server.
- C. The IPv4 protocol is required.
- D. It will be necessary to use an MTU setting other than the default.

E. The IPX protocol is required.

Answer: BE

NO.4 Which of the following are valid OpenVPN authentication modes? (Choose TWO correct answers)

- A. S/Key
- B. Kerberos
- C. Static Key
- D. Password
- E. TLS

Answer: CE

NO.5 An administrator has just configured an OpenVPN client. Upon starting the service, the following

message is displayed:

TLS Error: TLS key negotiation failed to occur within 60 seconds

Which of the following statements is true?

- A. The client was unable to establish a network connection with the server.
- B. The client was able to establish a network connection with the server, however TLS key negotiation failed, resulting in a fallback to SSL.
- C. The client was able to establish a network connection with the server, however TLS and SSL security are not enabled.
- D. The client was able to establish a network connection with the server, however TLS key negotiation took longer than 60 seconds, indicating that there may be a problem with network performance.

Answer: A

NO.6 Linux Extended Attributes include attribute classes. Which of the following are included in the

defined attribute classes? (Select THREE correct answers)

- A. default
- B. system
- C. owner
- D. trusted
- E. user

Answer: BDE

NO.7 You are certain that your kernel has been compiled with ACL support, however, when you try to set an

ACL on a file, you get the following output:

```
% setfacl m user:hugh:r afile.txt
```

```
setfacl: afile.txt: Operation not supported
```

What is the most likely reason for this problem?

- A. There is an error in the command line parameters.
- B. There is no user on the system named hugh.
- C. The partition has not been mounted with the acl option.
- D. The file afile.txt doesn't exist.

Answer: C

NO.8 Which LUKS action, when supplied to the cryptsetup command, will initialize a LUKS partition and set

the initial key? (Provide only the action name)

Answer: luksFormat

NO.9 An administrator has created a mapping with the following command:

```
cryptsetup luksOpen /dev/sda1 cryptvol
```

and has set three different keys. Which command below will delete the first key?

- A. `cryptsetup luksDelKey /dev/sda1 0`
- B. `cryptsetup luksDelKey /dev/sda1 1`
- C. `cryptsetup luksDelKey /dev/mapper/cryptvol 1`
- D. `cryptsetup luksDelKey /dev/mapper/cryptvol 0`

Answer: A

NO.10 An administrator has successfully configured a cryptographic volume for dmccrypt, and has added the

following line to `/etc/fstab`:

```
/dev/mapper/cryptvol /media/crypt auto defaults 0 0
```

Upon booting the system, the error message "mount: special device `/dev/mapper/cryptvol` does not exist"

is displayed. What configuration file has the administrator forgotten to edit? (Provide the full path and filename)

Answer: `/etc/crypttab`

NO.11 Which of the following are common techniques for securing a sendmail server?
(Select THREE correct answers)

- A. Maintain user accounts in an LDAP directory.
- B. Enable TLS.
- C. Disable VRFY.
- D. Run sendmail in a chroot'd environment.
- E. Disable USRLKUP.

Answer: BCD

NO.12 Which directive in the OpenVPN client.conf specifies the remote server and port that the client should connect to? (Provide only the directive, without any options or parameters)

Answer: remote

NO.13 What command will remove the dmccrypt mapping named cryptvol? (Provide the command with any options and parameters)

Answer: /sbin/cryptsetup remove crypt-vol cryptsetup remove crypt-vol

NO.14 What command will list basic information about all targets available to cryptmount? (Provide the command with any options or parameters)

Answer: cryptmount --list /usr/bin/cryptmount -l /usr/bin/cryptmount --list cryptmount -l

NO.15 When adding additional users to a file's extended ACLs, what is true about the default behaviour of the ACL mask for the file?

- A. The mask is modified to be the union of all permissions of the file owner, owning group and all named users and groups.
- B. The mask is left unchanged.
- C. If required, a warning is printed indicating that the mask is too restrictive for the permissions being granted.
- D. The mask is modified to be the union of all permissions of the owning group and all named users and

groups.

Answer: D

NO.16 Which of the following are valid dmccrypt modes? (Choose THREE correct answers)

- A. XTS
- B. ESSIV
- C. GMR
- D. KWG
- E. LRW

Answer: ABE

NO.17 SELinux has just been installed on a Linux system and the administrator wants to use SELinux in

permissive mode in order to audit the various services on the system. What command will switch

SELinux into permissive mode?

- A. setenforce 0
- B. /etc/init.d/selinux stop
- C. selinux passive
- D. /etc/init.d/selinux startpassive

Answer: A

NO.18 You wish to revoke write access for all groups and named users on a file. Which command will make

the correct ACL changes?

- A. setfacl x group:*:rx,user:*:rx afile
- B. setfacl x mask::rx afile
- C. setfacl m mask::rx afile
- D. setfacl m group:*:rx,user:*:rx afile

Answer: C

NO.19 What is the default UDP port for OpenVPN traffic?

Answer: 1194

NO.20 What does ntop use for data collection?

- A. Network packets
- B. Log files
- C. Frame relay

D. SNMP

Answer: A